CRIB LIGHTING

Y04 - INSTALLATION MANUAL

1. Wall Unit Installation
2. ULDC - Z Installation

Installation Manual
Setup Manual
User Manual

This manual shows how to install the CRIB Lighting Wall Unit of CRATUS.
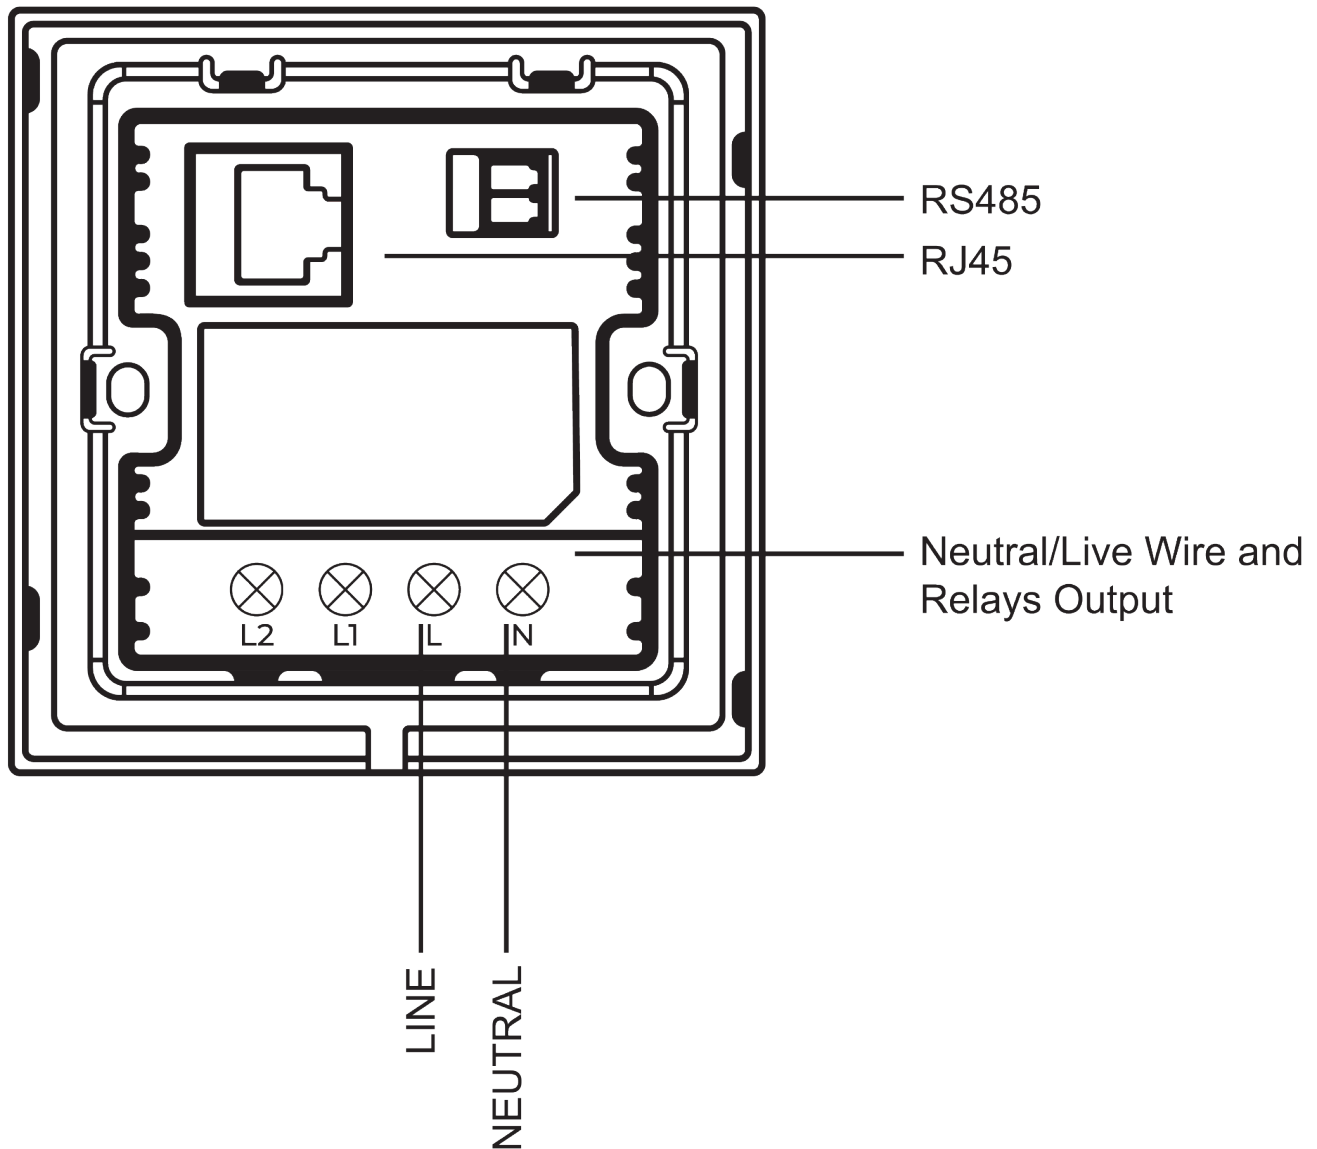
1. Safety Warnings

- The product must be installed by professional electricians.
- Turn off the main power in the electricity box and confirm the fire wire is not alive with a test pencil.
- The product should be kept away from fire and water during installation and use.
- The product can not be used in moisture circumstances such as the bathroom.
- Please note the product does not support POE power supply. Do not connect the PoE switch to this product which would cause damage to the product.

2. Installation Instructions

- Turn off the main power in the electricity box and confirm the fire wire is not alive with a test pencil.
- Remove the base of the Smart Switch and install it in the wall box (as shown in the pictures following).
- Check the wires and make sure the wires are in good contact with the terminals and no exposed copper wires.
- Fasten the base to the wall box with mounting screws and fix the Smart Switch back to the base.
- Note that the screws should not be fixed too tight during installation in case any deformation or damage to the screen and hardware.
- If the Smart Switch is not flat after installation, do not press the screen violently, please check the wallbox and the base installation at first.
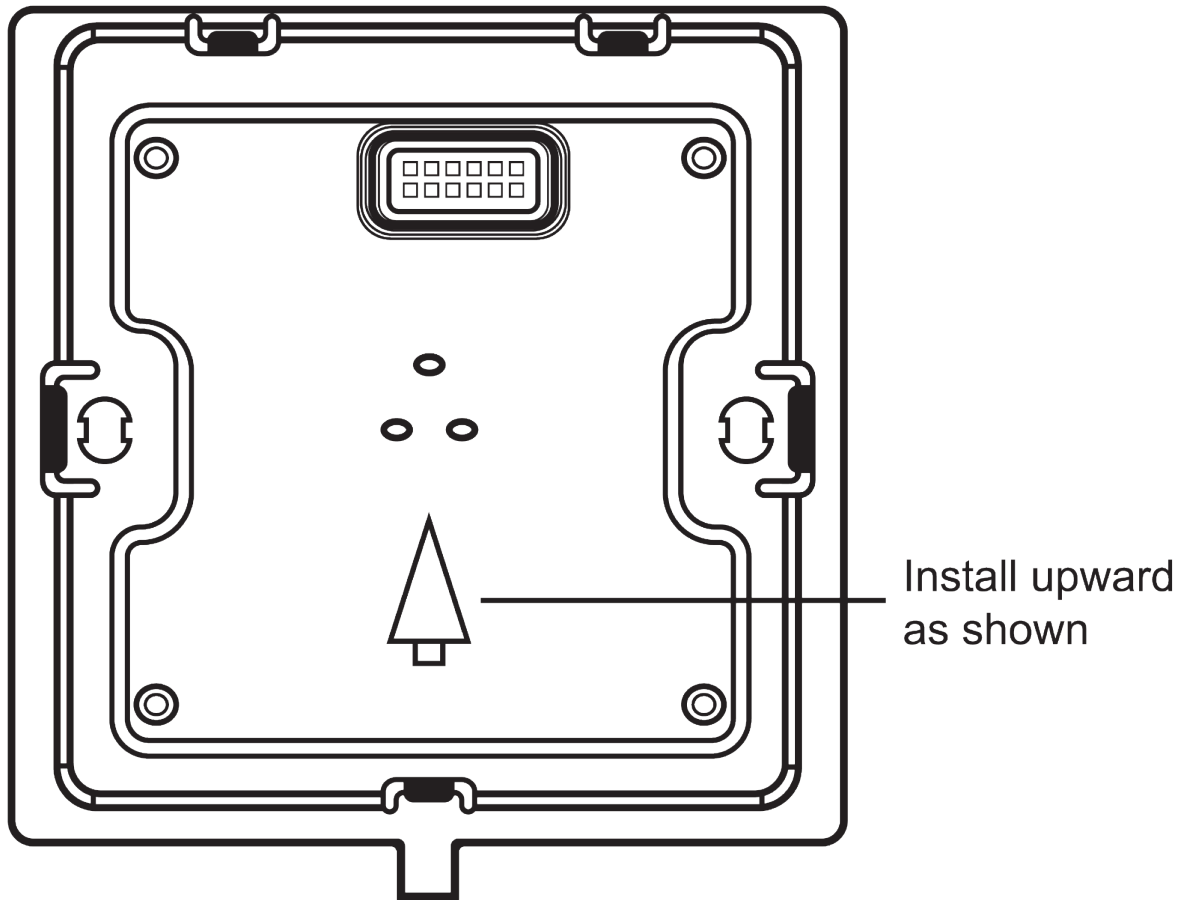
3. Wire Connection
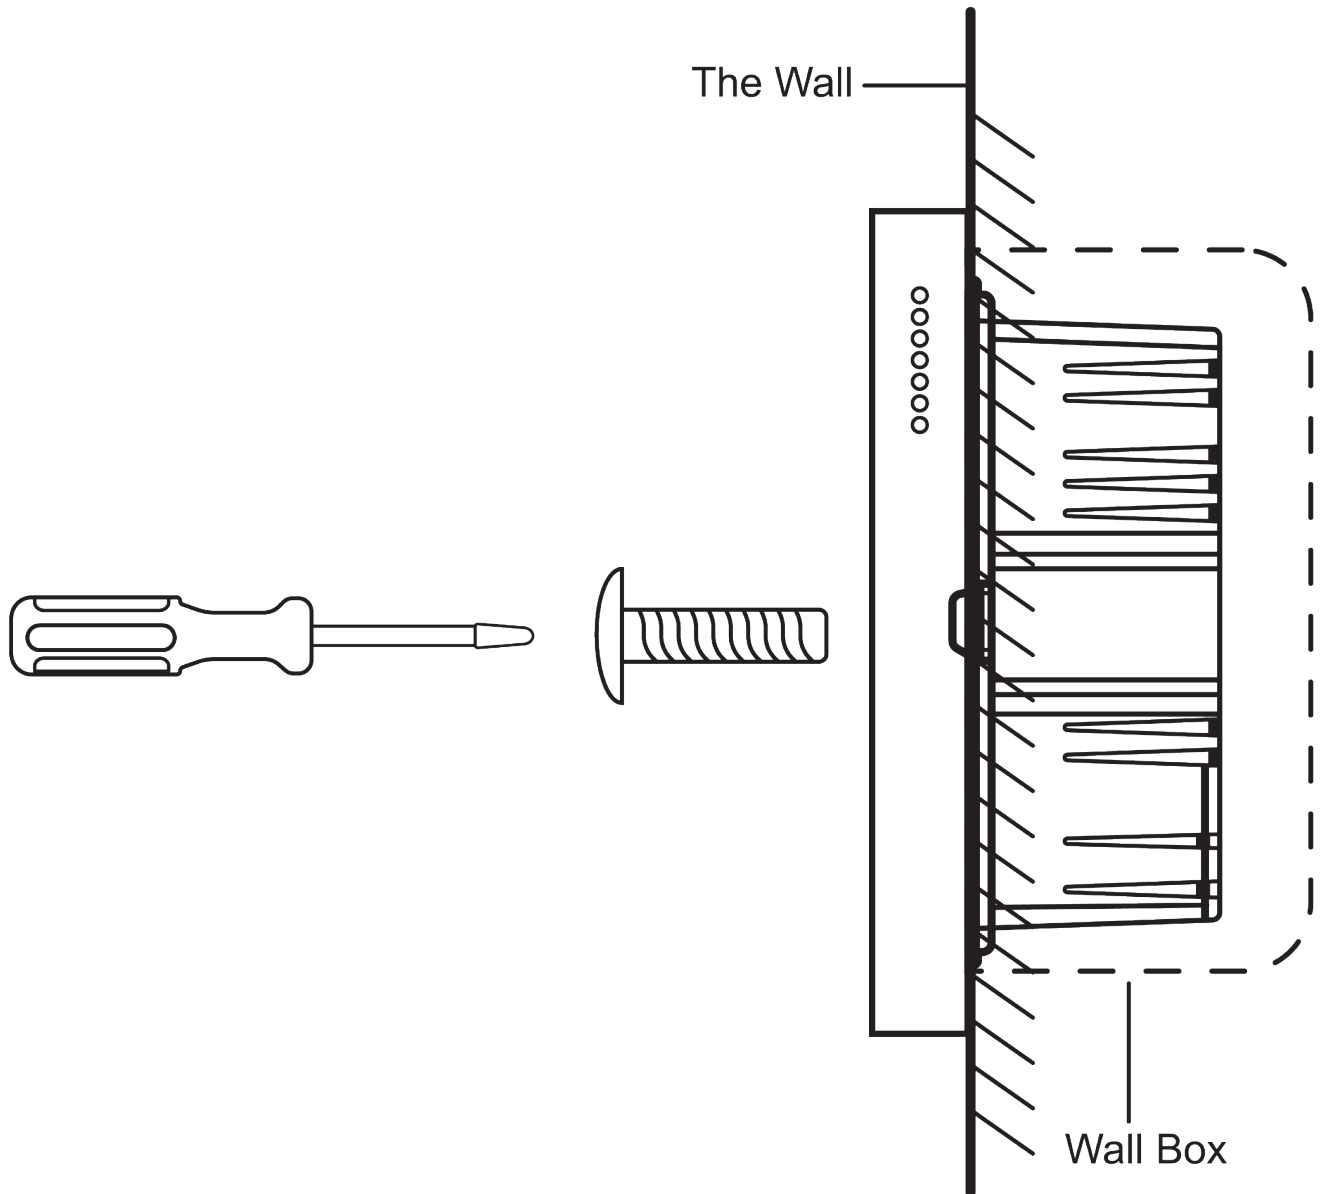
1. Make the connection as shown.

RS485

RJ45

Neutral/Live Wire and Relays Output

L2 L1 L N

LINE

NEUTRAL

4. Chassis Mount

1) Place it in the correct direction

Install upward
as shown

2) Mount it with a screwdriver.

The Wall

Wall Box

Note: Depth of the wall box must be more than 50mm.