


ULDC-Z Installation Instructions

Electrical Installation Diagram

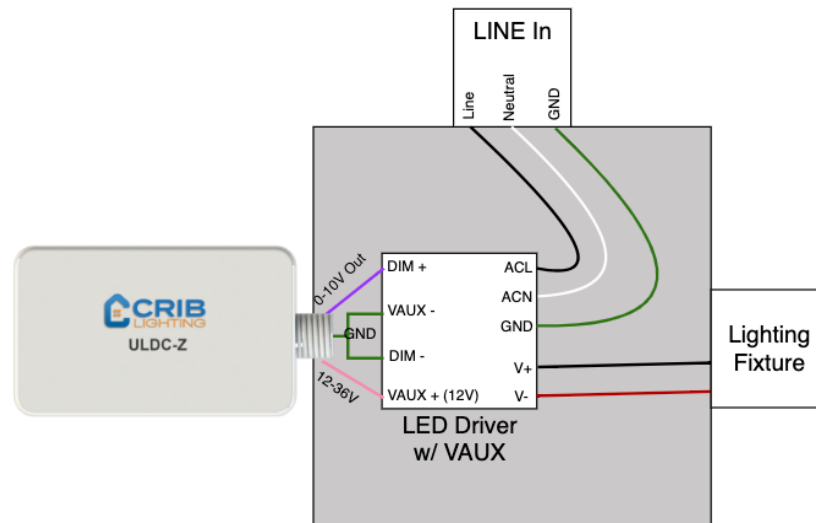

1. Disconnect power by circuit breaker
2. Check the line with voltage tester pen, make sure the power is off to prevent electric shock
3. Connect the ULDC-Z wires to the LED driver and check for short circuit
4. Connect Red wire (36+) to Vaux+
5. Connect Black (GND) wire to Vaux- and DIM-
6. Connect Purple (0-10V) wire to Dim+.
 - For further instruction refer to the wiring diagram.
7. LED driver must output a minimum of 5V-36VDC to supply ULDC-Z power
8. Screw or place ULDC-Z into back of light fixture
9. Cover mount with cover plate
10. Connect circuit breaker restore power